


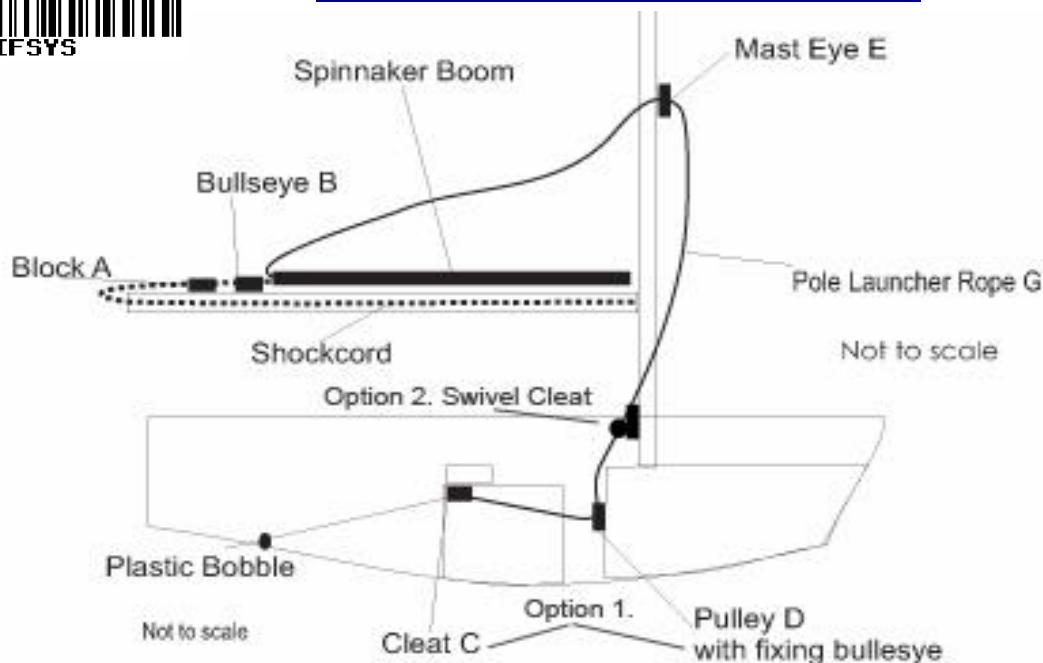

TRMIRSPIFSYS

**Mirror FlyAway Pole System**

**Block A.** Fit to top of boom, slightly off centre to starboard 610mm from aft end of boom, pulley nearest to mast.

**Bullseye B.** Fit 1460mm from aft face of mast on top of boom

**Cleat C** Attach to starboard underside of thwart, 50mm from daggerboard case at rear of thwart with fairlead AL\_A.488 fitted on top of the cleat .

**Pulley D** with lacing eye, fit on bulkhead – 150mm from floor, 10mm on starboard side, or in channel if on GRP boat.

**Mast Eye E** Attach to mast 1.1m from base such that one arm of the eye is on the starboard side of mast (reduces friction when launching).

**Shockcord F** Thread shockcord from back or spinny pole, through the bullseye round block A and attach/tie to gooseneck fitting on boom.

**Pole Launcher Rope G** Thread rope from back of spinny pole, through mast eye E, down through pulley D and finally back through Cleat C. Attach plastic bead to rope end

Part No.	Description	Qty	Picked
	Pole unit with Launch Rope & Shockcord	1.00	
AL-A4078	Block A	1.00	
AL-A4153	Bullseye. B	1.00	
AL-A..77	Cam Cleat. C	1.00	
AL-A.488	Fairlead. C	1.00	
HT92514	Block D with Lacing eye & Spring	1.00	
No. 6x 1 ½ “	Screws Pan Head for cleat D	2.00	
M4 x 25mm	Threaded Bolts inc Nuts & washers	2.00	
AL-A4332	Mast Eye E	1.00	
No. 6x 1”	Screws Pan Head for block A	2.00	
No. 6x ¾ “	Screws Pan Head for bulls eye B	2.00	
	Pop Rivets 5mm for mast eye E	3.00	

**We hope you are fully satisfied with your new purchase, if however you require any further assistance please feel free to contact us on**

**[sales@tridentuk.com](mailto:sales@tridentuk.com) or 0191 4901736**

**And check out [www.tridentuk.com](http://www.tridentuk.com) for more great sailing kit and ideas**