



Part No. TRWAYRUDN


Rudder Downhaul System

We hope you are fully satisfied with your new purchase.

If however you require any further assistance please feel free to contact us on

sales@tridentuk.com or 0191 4901736

And check out www.tridentuk.com for more great sailing kit and ideas

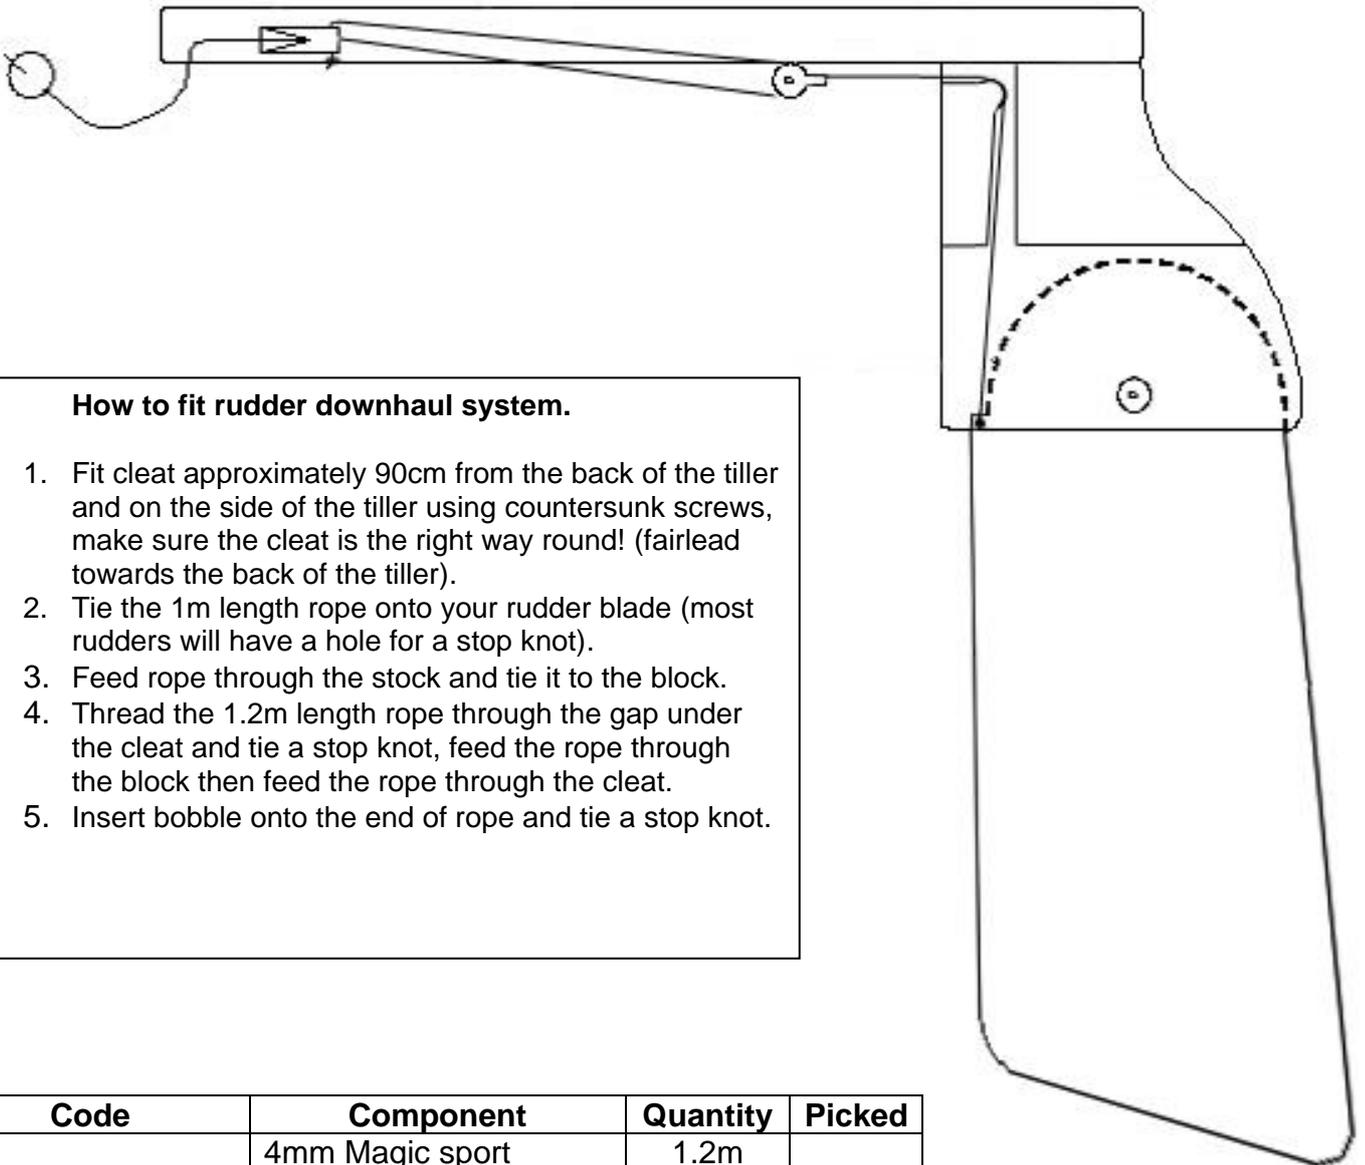

How to fit rudder downhaul system.

1. Fit cleat approximately 90cm from the back of the tiller and on the side of the tiller using countersunk screws, make sure the cleat is the right way round! (fairlead towards the back of the tiller).
2. Tie the 1m length rope onto your rudder blade (most rudders will have a hole for a stop knot).
3. Feed rope through the stock and tie it to the block.
4. Thread the 1.2m length rope through the gap under the cleat and tie a stop knot, feed the rope through the block then feed the rope through the cleat.
5. Insert bobble onto the end of rope and tie a stop knot.

Code	Component	Quantity	Picked
	4mm Magic sport	1.2m	
	4mm Magic sport	1m	
JHCL211Mk2AN/S2	Clam Cleat with becket	1	
AL-A4078	Block	1	
No. 8 x 12mm	Counter Sunk Screws	2	
SS25-35	22mm Bobble	1	